



SPECIFICATIONS

621RE

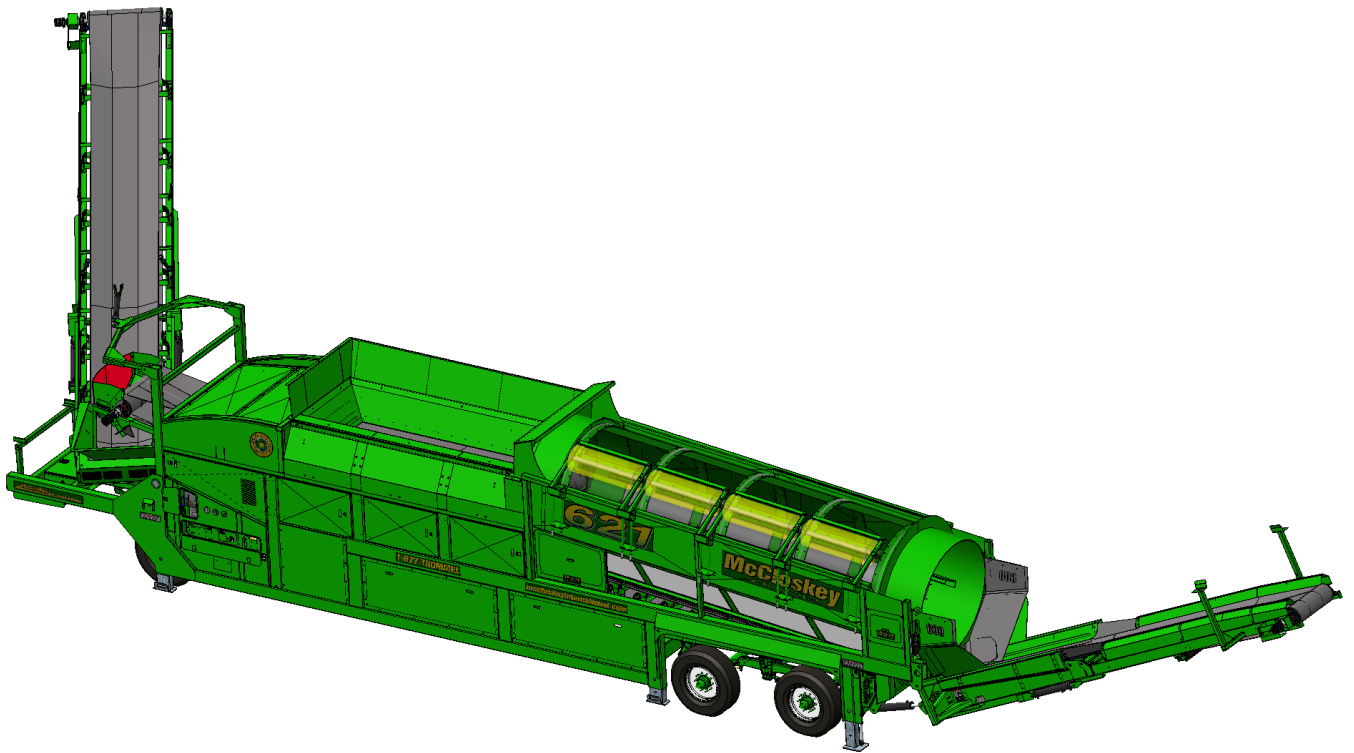

Note: Optional equipment may be displayed



DESCRIPTION

Heavy duty mobile trommel with the following features:

- 6'x21' heavy duty trommel drum
- 174HP CAT engine
- Wheel mobile or hydraulic raise/lower track bogie system
- Integrated hydraulic folding stockpiling conveyors
- Remote control radial conveyor
- Fast on site setup time (10 minutes)

SAFETY FEATURES

- External belt alignment points
- External grease points
- Engine safety shutdown systems
- Full safety guarding for nip points

DIMENSIONS AND WEIGHTS


Transport length	18.52m (60' – 9")
Transport width (wheeled)	2.59m (8' – 6")
Transport width (tracked)	2.94m (9' – 8")
Transport height	4.11m (13' – 6")
Weight (wheeled)	23,400 Kgs (51,500 lbs.)
Weight (tracked)	33,700 Kgs (74,250 lbs.)
Load height	3.2m (10' – 6")
Working length	29.13m (95' – 6½")
Working width	15.1m (49' – 6½")
Working height	5.11m (16' – 9")

CAPACITIES

Diesel tank capacity (wheeled)	1210 L (320 US gal)
Diesel tank capacity (tracked)	680 L (180 US gal)
Hydraulic tank capacity	954 L (252 US gal)
Hopper capacity	5 m ³ (6.5 yd ³)

FEED CONVEYOR

Belt width	1050mm (42")
Belt spec	Plain 630/4 6+2
Drive drum dia.	323mm (12.75")
Tail drum dia.	305mm (12")
Gearbox	Brevini CTD2051
Gearbox ratio	34,7:1
Motor	Sam Hydraulik BRZ250
• Flow rate	83 l/m (22 US g/m)
• Adjustable speed	Yes
• Maximum speed	10 rpm



FINES CONVEYOR

Belt width	1050mm (42")
Belt spec	Plain 400/3 4+2
Drive drum dia.	254mm (10")
Tail drum dia.	305mm (12")
Motor	White DR33
<ul style="list-style-type: none"> • Flow rate • Maximum speed 	75 l/m (20 US g/m) 143 rpm

RADIAL CONVEYOR


Stockpile height	5.11m (16' – 9")
Belt width	1050mm (42")
Belt spec	Plain - 400/3 4+2
Drive drum dia.	254mm (10")
Tail drum dia.	254mm (10")
Motor	White DR33
<ul style="list-style-type: none"> • Flow rate • Maximum speed 	75 l/m (20 US g/m) 143 rpm

OVERSIZE CONVEYOR

Stockpile height	3.47m (11 - 4½")
Belt width	900mm (36")
Belt spec	Chevron - 315/3 3+1.5
Drive drum dia.	254mm (10")
Tail drum dia.	254mm (10")
Motor	White DR33
<ul style="list-style-type: none"> • Flow rate • Maximum speed • Adjustable speed 	68 l/m (18 US g/m) 130 rpm Yes

TROMMEL (DRUM)

Dimensions	1.83m x 6.4m (6' x 21')
Screening area	27.5 m ² (296 ft ²)
Trommel angle	5 deg
Trommel motor	Poclain MSE02 (22.2 cc/rev)
Drive system	Direct drive with 18x7 rubber wheels
Hydraulic flow rate	170 l/m (45 US g/m)
Trommel speed	10 – 30 rpm
Adjustable speed	Yes
Longitudinal trommel supports	5 angle type lifters
Cleaning brushes	Ground adjustable Ø16x50" polyester brushes



POWERUNIT AND HYDRAULICS

Engine	CAT C6.6
• Power	130 kW (174 HP)
• Speed	2200 rpm
Flywheel Pump 1	David Brown R5000
LH PTO Pump 2	Vicker's V20
Total system flow	397 l/m (105 US g/m)
Hydraulic tank capacity	940 L (250 US Gals)
Hydraulic tank ratio	2.4 : 1
Hydraulic oil cooler	Yes

ELECTRICS


Emergency stops	4 off, located on all 4 corners of the machine
Chassis cabling	Armored cable
Start Siren	Yes (10 sec delay)
Engine shutdowns:	Low oil pressure High water temp Air filter blockage (selectable) Fuel contamination Low hydraulic tank level
Engine room light	Yes
Remote radial	Yes - 6 function timed
Radio control tracks	Yes - hetronic system
Pendant track control	Yes - plugged at powerunit

TRACKS

Width	500mm (19.7")
Length	3710mm (12' - 2") crs
Height	739mm (29.4")
Gearbox	Bonfiglioli 707
Ratio	122:1
Motor	Rexroth 63
Speed max	1.5 Kph (0.9 Mph)
Flow rate	75 l/m (20 US g/m)
Attachment to chassis	Bolt on for quick change

WHEELS

Axles (wheeled)	Spread Tandem Axle 1.83m (72")
Axles (tracked)	Spread Tri-axle 1.25m (49")
Wheels (wheeled)	Single 315/80R22.5 (4 tires)
Wheels (tracked)	Dual wheel 11/R22.5 (12 tires)
Spring suspension	Yes
Brakes	Yes
Mudguards	Yes
ABS	Optional



OPTIONS

- Hydraulic tipping grid
- Double brushes
- Auto reversing fan
- Auxiliary hydraulic circuit
- Punch plate screens
- Remote feeder on/off
- Single or double deck live head
- Hydraulic raise/lower track system

